

Technical Rider Rodahal Kerkrade

Stage

Stage: 23.10m (w) x 7.81m (d) x 1.30m (h)

Clearance: 6,00m from stagefloor to truss or 5,00m to lighting.

Black box: 13.00m (w) x 7.81m (d)

Power

Power (house): 2x 125A CEE (these are in use by the house system for Audio & Lights).

Available Power: 1x 63A CEE or 2x 32A CEE Stage left or right.

Rigging

Truss: Prolyte H40V

Hoists: CM-F Lodestar

Front truss: 20 Meters - Front lighting (*2x 500kg CM Lodestar*)

1st Truss: 28 Meters - Audio, lighting & backdrops (*6x 1000kg CM Lodestar*)

Mid Truss: 20 Meters – Lighting 4x (*500kg CM Lodestar*)

Back Truss: 20 Meters - Lighting & backdrops (*4x 500kg CM Lodestar*)

Side Truss: 9 Meters - Lighting & backdrops

Lighting

Find a full patch list on page **3**.

14x Vari*Lite VL3015LT Spot

6x Vari*Lite VL3500 Wash FX (Floor set)

12x Robe Robin 1200 LEDWash

2x Showtec LED Studiobeam (Side lights)

6x DeSisti Lighting Leonardo 2kW P.O. (Front lights)

4x Audience 4-way Blinder

Dimmer: Used for front lights (DeSiSti)

Light console: on request

Sound:


- 16x DB Technologies Vio L212 active line array (Main PA)
- 12x DB Technologies Vio S218 active subwoofer 2 x 18"
- 2x DB Technologies Vio X12 (infill)

Sound Console: on request

Video:

Left screen: 5,28 x 2,88mtr Martin EC10, 10mm LED

Right screen: 5,28 x 2,88mtr Martin EC10, 10mm LED

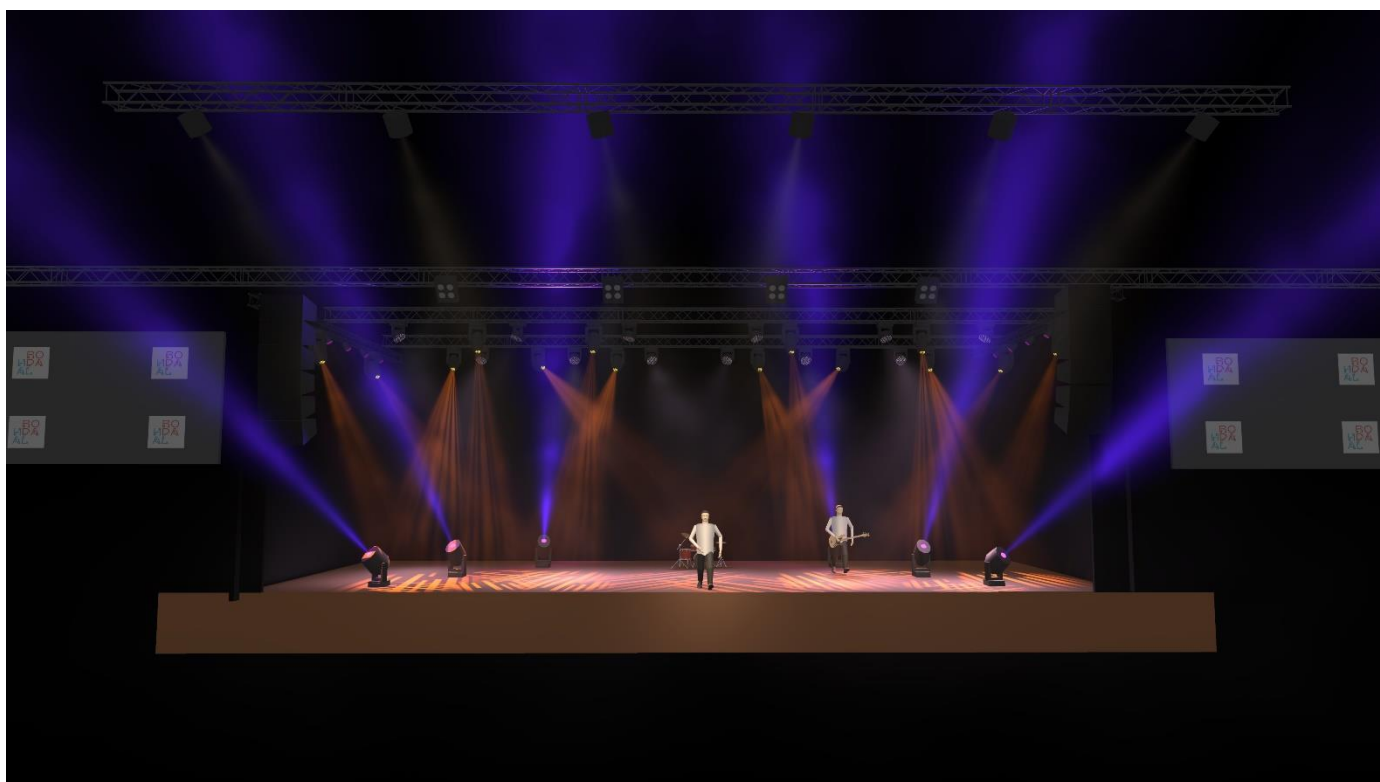


Fixture Patch

	Fixture	Position	Mode	Address
V1	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 010
V2	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 046
V3	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 082
V4	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 118
V5	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 154
V6	Vari*Lite VL3015 LT	Back Truss	(36ch)	A. 190
V7	Vari*Lite VL3015 LT	Mid truss	(36ch)	B. 172
V8	Vari*Lite VL3015 LT	Mid truss	(36ch)	B. 208
V9	Vari*Lite VL3015 LT	Mid truss	(36ch)	B. 244
V10	Vari*Lite VL3015 LT	Mid truss	(36ch)	B. 280
V11	Vari*Lite VL3015 LT	Left truss	(36ch)	B. 100
V12	Vari*Lite VL3015 LT	Left truss	(36ch)	B. 136
V13	Vari*Lite VL3015 LT	Right truss	(36ch)	B. 316
V14	Vari*Lite VL3015 LT	Right truss	(36ch)	B. 352
R1	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 226
R2	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 241
R3	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 256
R4	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 271
R5	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 286
R6	Robe ROBIN 1200 LED Wash RGBW	Back Truss	M3 (15ch)	A. 301
R7	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 388
R8	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 403
R9	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 418
R10	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 433
R11	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 448
R12	Robe ROBIN 1200 LED Wash RGBW	Mid truss	M3 (15ch)	B. 463
S1	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 010


S2	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 017
S3	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 024
S4	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 031
S5	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 038
S6	Showtec LED Studiobeam Pro RGB	Left truss	7 ch	B. 045
S7	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 052
S8	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 059
S9	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 066
S10	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 073
S11	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 080
S12	Showtec LED Studiobeam Pro RGB	Right truss	7 ch	B. 087
F1	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 500
F2	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 501
F3	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 502
F4	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 503
F5	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 504
F6	Strand 2kW PO Fresnel	Front Truss	1 ch	B. 505
B1	Showtec Active Stage Blinder (4 light)		2 ch	B. 001
B2	Showtec Active Stage Blinder (4 light)		2 ch	B. 003
B3	Showtec Active Stage Blinder (4 light)		2 ch	B. 005
B4	Showtec Active Stage Blinder (4 light)		2 ch	B. 007
W1	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 320
W2	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 342
W3	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 364
W4	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 386
W5	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 408
W6	Vari*Lite VL3500 Wash FX	Floor	22 ch	A. 430

Rodahal Kerkrade Plot


Front View (Pers)

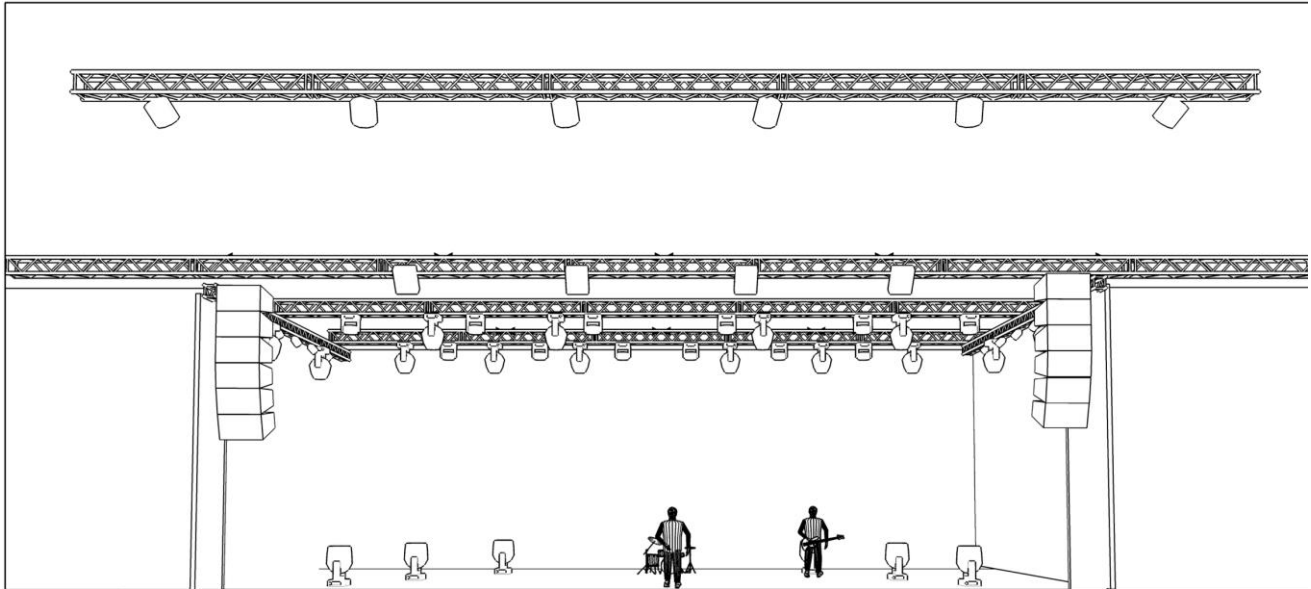


Front View

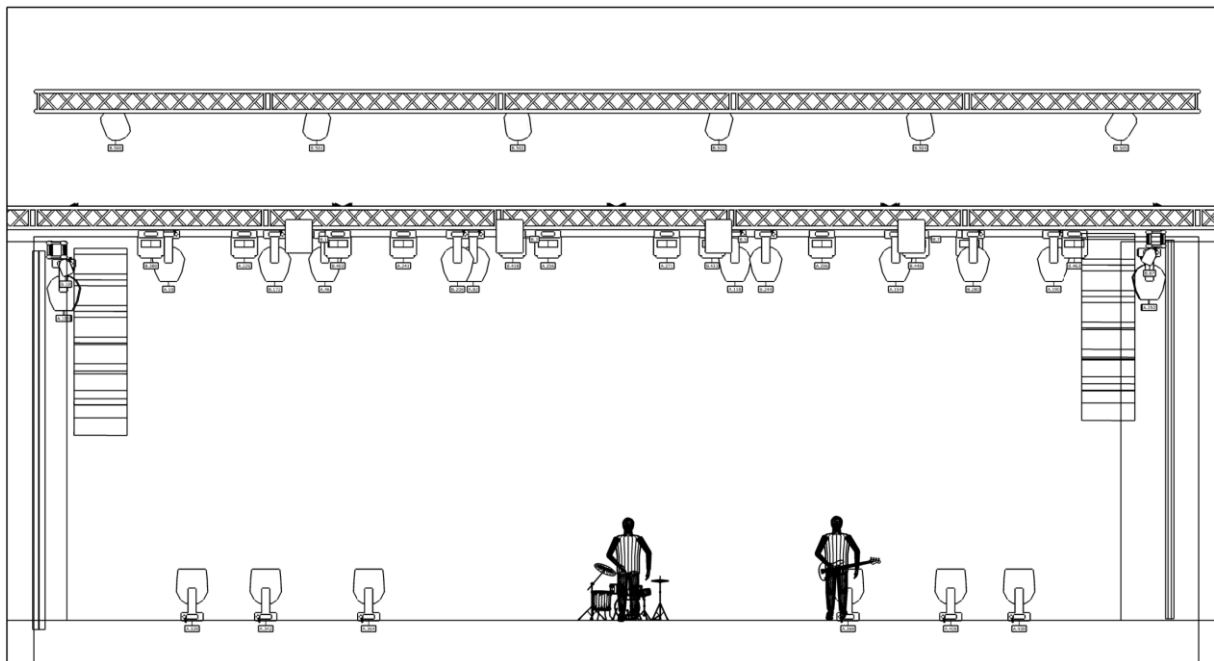

Side View

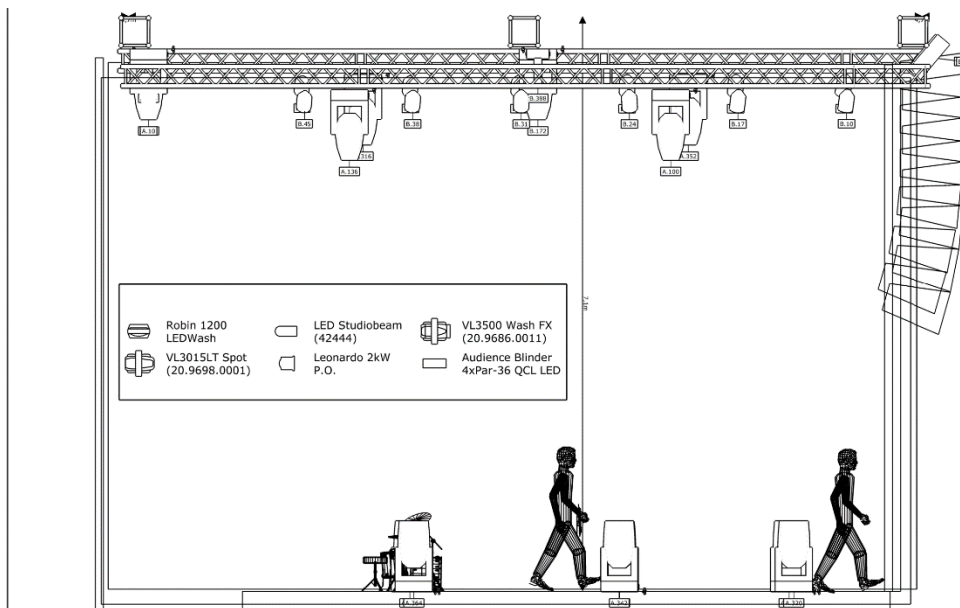

Top View

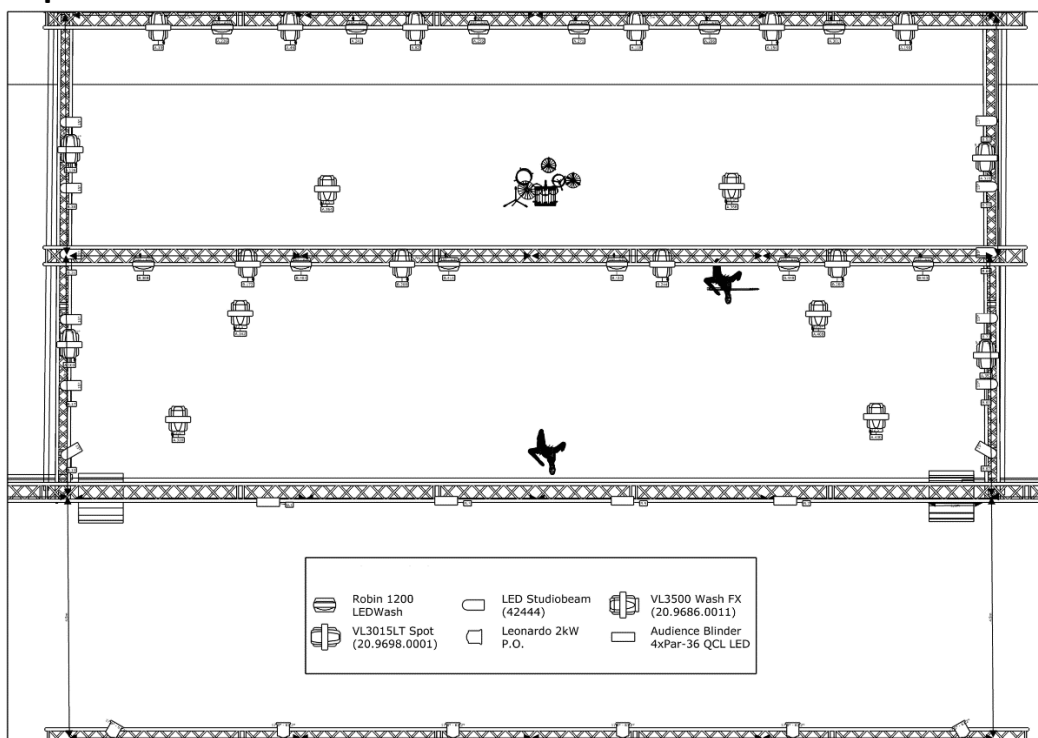



Thank you for reading our technical rider.
Feel free to contact us if you have any questions.

E-Mail: techniek@rodahal.nl